


# **Thermal View and Thermal View Finishing Analysis Software**

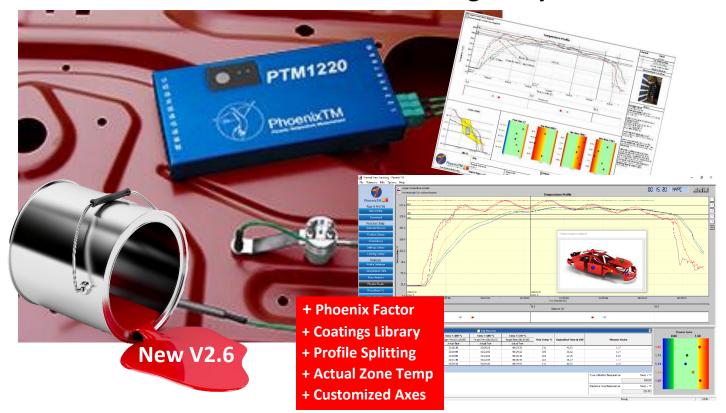

PhoenixTM 'Thermal View Finishing' is a powerful, comprehensive yet easy to use software package designed specifically for the PhoenixTM Compact and Finishing 'Thru-process' Temperature Profiling systems. The software has been developed to allow not only control of the data logger but also permit the detailed review, analysis and reporting of the thermal cure profile. Features supplied in the software program have been developed to allow the user to accurately determine that the paint or powder coating is achieving the correct cure to provide the required physical and cosmetic properties. The software takes raw temperature data and coverts it to useful information that allows understanding, control, optimization and validation of the cure process.

When data is downloaded from the logger, the results are automatically saved in a database which can be organised in a logical manner for easy access to historical process data. Where profiles consist of multiple oven peaks the profile can be split into separate easy to analyse profiles. Process templates can be constructed for each profile run. With a simple click, all saved Oven settings (Zones & Set-points), Product information (Probe locations on product image) and Coating Library (Phoenix Factor or Cure Chart parameters) can be attached to the profile. The Thermal View Finishing software comes with a choice of cure analysis tools. The Phoenix Factor calculates a cure index value using the whole profile data against the coating suppliers cure specification. With a single number cure status can be accurately quantified easily and efficiently (PF =1 theoretical cure <1 Undercure > 1 Overcure). Alternatively, a graphical cure function including CureChart analysis allows instantaneous visual identification of cure performance against Time @ Temperature thresholds. To complement the profile data the user can add additional notes either on the profile pointing out profile features of interest or in the notes section which may allow complementary QA test data to be added. Customized report options allow the user to select the optimal format to present profile findings which can be printed directly or saved as a PDF which can be shared efficiently (via e-mail) to any interested parties.

### www.phoenixtm.com

### www.phoenixtm.de



#### Feature List comparing basic Thermal View Software (TV) & Thermal View Finishing Software (TV Finishing) V2.6

Feature	ΤV	TV	Benefit
		Finishing	
Full Logger Programming Options	•	•	Set-up data logger to meet conditions of profile run (Probes, Sample Interval, Start mode etc etc)
USB Real Time Analysis	•	•	Analyse live real time data directly from the logger (Comms Cable)
RF & BT Real Time Analysis	-	•	Analyse live real time data directly from the logger (RF & Bluetooth)
Profile Splitting		•	Split a profile with multiple oven peaks into separate profiles for easy analysis
Temperature Data	•	•	Scroll across the profile and view data by each reading
Time Above Temperature	•	•	Calculate Time @ Temperature against paint supplier specification
Max, Min, Mean Temperature	•	•	Measure Max, Min Mean temperature by oven zone or custom zone
Rise & Fall Slope	•	•	Confirm that powder melt or solvent flash off is correct for cosmetic finish
Maximum Difference	-	•	Prove temperature uniformity over product/oven (Car body left/Right)
Tolerance Curve		•	Instantly check that the profile shape is constant against ideal shape
Reference Profile	•	•	Compare historic data to see how the process has changed over time
On Screen Notes	•	•	Describe what the profile is showing directly on the graph
Phoenix Factor (Index of Cure)	•	•	Accurate calculation of total equivalent cure from the profile trace
Graphical Cure (Time @ Temp)	-	•	Quick simple identification of Cure compliance from Graphic Pass/Fail
Graphical Cure (Cure Chart)		•	Comprehensive Time @ Temp analysis vs Digital Paint Supplier Cure Chart
Zooming Options (Full, Profile, Custom)	•	•	Select the area of the profile you wish to focus on
Database Management Tool	•	•	Set-up unique databases to archive profile runs by process or product
Merge Profile Data	-	•	Combine two profiles from two systems to a single profile report
Process Template Files		•	Create template files to describe the parameters for all your different processes.
		-	Use to make routine profiling quick and efficient.
Product Library Files	٠	•	Show exactly where probes are located on products for clarity
Coating Library Files		•	Store Paint Cure analysis parameters for either Phoenix Factor or CureChart to
			remove need for repeated parameter input run after run.
Oven Library Files		•	Build a visual representation of the oven against which the profile is displayed.
			Identify location of cold spots in the actual oven.
Oven Settings Library Files		•	Compare profile trace to actual oven set-point temperatures in each zone
Auto Language Change Option	•	•	Change language in SW to allow use by multi-cultural teams
On Screen Help	•	•	Help direct in the software where you need it
Logger on Board Calibration Cert	•	•	View and Print Logger Calibration Certificate direct from logger
Graph Display Options	•	•	View the profile graph in the format you prefer
Customized Axes	•	•	Configure temperature and time axes to required default settings
Thermocouple Alignment Function	•	•	Correct for probe location differences so that time references are equal
Data Import and Export (CSV)	•	•	Share data between different systems (Profilers/Systems)
Password Security		•	Protect your files from tampering or accidental deletion
Import from PTM Mobile Format	•	•	Read data files collected on the PhoenixTM Mobile App
Print Report Options	•	•	Customize report format to exact needs (Graph, 1 page or Full Report)
Customer Report - Company Logo	•	•	Customize reports to include full company information including logo
Report Actual Oven Zone Temperatures		•	Document actual oven zone temperatures against set-points in report
Thermocouple and Logger Correction Factors		•	For important TUS work apply both logger and thermocouple correction factors to maximize accuracy of the profile data.

Note: All Products are continually improved, specifications may be changed without prior notice. Ref: PhoenixTM\_Datasheet\_SW45\_10.6\_USA 20220118

#### **Represented by:**

PhoenixTM LLC. 4600 140<sup>th</sup> Avenue North, Suite 180, Clearwater FL 33762 USA Tel: +1(727)608 4314 info@phoenixtm.com



PhoenixTM Ltd. 25 Earith Business Park Meadow Drove, Earith, Cambridgeshire PE28 3QF, UK Tel: +44 (0) 1353 223100 sales@phoenixtm.com



PhoenixTM GmbH Dehmer Str 48 32549 Bad Oeynhausen, Germany Tel: +49 5731 300280 info@phoenixtm.de

## www.phoenixtm.com

# www.phoenixtm.de